

# Geoball.20 – Product Specification



## Geos – Multifunctional play domes



Anything goes with the Geos. These structures are ideal for climbing on the inside or outside.

The Geos offer enough space on the inside to play soccer or as a safe play area with plenty of room for hammocks.

### At a glance.

Product Family:	<b>Geos</b>	Number of Foundations:	<b>6 pc.</b>
Item Number:	<b>95.130.204</b>	Concrete Volume C20/C25:	<b>1,1 m<sup>3</sup> (38.9 ft<sup>3</sup>)</b>
Children's Age:	<b>5+</b>	Number of skilled installers required:	<b>2</b>
Fall Height (DIN EN 1176):	<b>2.76 m (9'-1")</b>	Installation Time without foundation:	<b>20 hours</b>
Length x Width x Height:	<b>7.3 m x 7.3 m x 3.0 m</b> <b>(23'-11" x 23'-9" 9'-5")</b>	Dimensions of largest part:	<b>1,2 m x 0,8 m x 0,5 m</b> <b>(4'-0" x 2'-8" 1'-8")</b>
Protective Surfacing Area (DIN EN 1176):	<b>10.3 m x 10.3 m</b>	Weight of heaviest part:	<b>50 kg (110.3 lbs)</b>
Protective Surfacing Area (ASTM 1487):	<b>11.0 m x 11.0 m</b> <b>(35'-11" x 35'-10")</b>	Shipping Volume:	<b>9.2 m<sup>3</sup> (325 ft<sup>3</sup>)</b>
Minimum space required DIN EN 1176:	<b>82.4 m<sup>2</sup></b>	Spare part guarantee:	<b>Lifelong</b>
Minimum space required ASTM 1487:	<b>93.4 m<sup>2</sup> (1,005.3 sf)</b>		

# Geoball.20 – Product Specification

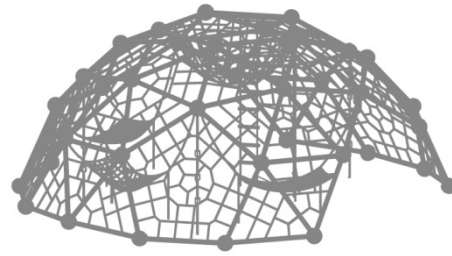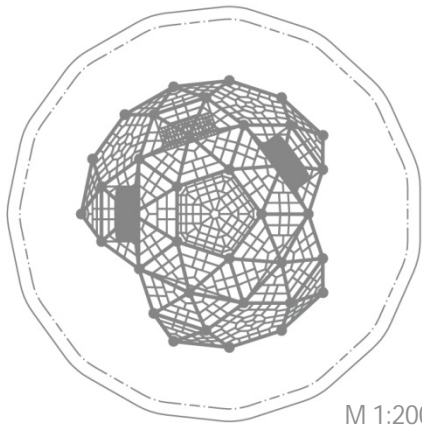

## Technical Data.

The following text can also be used for tenders.

Geoball.20 (LxWxH: 7.3 m x 7.3 m x 3.0 m / 23'-11" x 23'-9" 9'-5") with TÜV-certificate according to DIN EN 1176 and 10-years warranty-certificate consists of the following elements:

### Members:

Framework-steel pipes,  $\varnothing$  60.3 mm (2 3/8"); anticorrosion treatment and color finish: sandblasting and zinc-/ epoxy-/ polyester-process.

### Nodes:

Framework-aluminum ball connectors,  $\varnothing$  250mm (9-13/16"); anticorrosion treatment and color finish: sandblasting and zinc-/ epoxy-/ polyester-process; secured with durable ebonite caps.

### Ropes:

U-Rope-round strand ropes with steel cores,  $\varnothing$  16mm (5/8") – unless otherwise noted; galvanized wires, external strands covered with non-abrasive UV-resistant Polyester-yarn.

### Netting:

Rope crossing points localized with hydraulically pressed ball knots comprised of corrosion resistant forged alloyed aluminium (no plastic).

