

Net House.02 – Product Specification



HodgePodge – A variety of study and durable sport and play elements


HodgePodge is a clever and versatile combination of play equipment and climbing structures that can be used anywhere and for numerous activities.

Climbing trees, a Wasp's nest, Volleyball nets for sporting activities, cable rides for fun and excitement.


Net House.02 – At a glance.

Product Family:	HodgePodge	Number of Foundations:	5 pc.
Item Number:	90.130.003	Concrete Volume C20/C25:	0.7 m³ (24.7 ft³)
Children's Age:	3+	Number of skilled installers required:	2
Fall Height (DIN EN 1176):	1.49 m (4'-11")	Installation Time without foundation:	7 hours
Length x Width x Height:	6.8 m x 4.4 m x 3.1 m (22'-1" x 14'-5" x 10'-0")	Dimensions of largest part:	0.6 m x 0.7 m x 4.0 m (2'-0" x 2'-4" x 13'-1")
Protective Surfacing Area (DIN EN 1176):	10.3 m x 7.4 m	Weight of heaviest part:	100 kg (220.5 lbs)
Protective Surfacing Area (ASTM 1487):	10.7 m x 8.1 m (35'-1" x 26'-5")	Shipping Volume:	3.3 m³ (116.5 ft³)
Minimum space required DIN EN 1176:	43.3 m²	Spare part guarantee:	Lifelong
Minimum space required ASTM 1487:	54.8 m² (589.9 sf)	Certificate according to EN 1176:	No.: Z2.16.01.10256.257 TÜV Product Service

Net House.02 – Product Specification

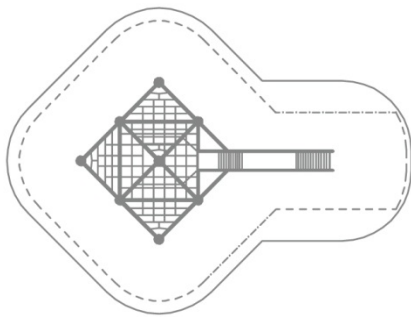

M 1:200

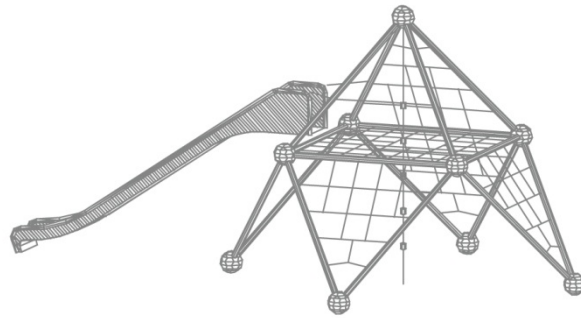

Technical Data.

The following text can also be used for tenders.

- Net House
- Climbing rope
- Box slide

Members:

Framework-steel pipes, $\varnothing 60.3$ mm (2 3/8"); anticorrosion treatment and color finish: sandblasting and zinc-/ epoxy-/ polyester-process.

Nodes:

Framework-aluminum ball connectors, $\varnothing 250$ mm (9-13/16"); anticorrosion treatment and color finish: sandblasting and zinc-/ epoxy-/ polyester-process; incorporating an ASTM TT net tensioning system, securely closed with durable ebonite caps.

Ropes:

U-Rope-round strand ropes with steel cores, $\varnothing 16$ mm (5/8") with galvanized wires, external strands are covered with non-abrasive UV-resistant Polyester-yarn. Maximum breaking stress 115kN.

Plannar netting:

Rope $\varnothing 16$ mm (5/8"); mesh size minimum 250 x 250 mm (9-4/5"); rope crossing points localized by durable, drop forged aluminum ballknots (no plastic)

Climbing rope:

Rope $\varnothing 21$ mm (13/16"), vertical rope with worked-in ebonite cylinders, distance between cylinders 250-300mm (9-13/16" to 11-13/16").

Slide:

Box slide made from corrosion resistant steel grade: AISI304 (DIN 1.4301). Attached with BSF-aluminium clamps.

