
Orbit.02 – Product Specification

Urban design



Orbit.02 The Orbit.02 has one curve more than the Orbit.01. For those who like having a longer balancing challenge from one end to the other.

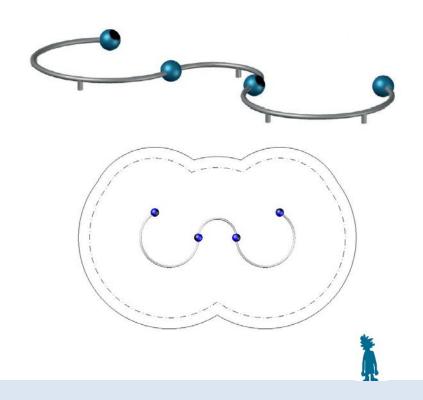

Orbit.02 - at a glance.

Product Family: Item Number: Children's Age: Fall Height (DIN EN 1176): Length x Width x Height:

Protective Surfacing Area (DIN EN 1176): Protective Surfacing Area (ASTM 1487):

Minimum space required DIN EN 1176:

Minimum space required ASTM 1487:

Playpoints 90.160.212

3+ 0.3 m (1'-0") $4.7 \, \text{m} \, \text{x} \, 1.8 \, \text{m} \, \text{x} \, 0.3 \, \text{m}$

(15'-5" x 5'-11" x 1'-0") 7.7 m x 4.8 m

8.4 m x 5.5 m (27'-7" x 18'-1")

 $30.9\,m^2$ 38.3 m² (413 ft²) Number of Foundations: Concrete Volume C20/C25:

Number of skilled installers required: Installation Time without foundation: Dimension of largest part:

Weight of the heaviest part: Shipping Volume:

Shipping Weight: Spare part guarantee:

Certificate according to DIN EN 1176:

8 pc.

0.8m3 (28.3ft3) -

2 hours

 $1.9 \, \text{m} \, \text{x} \, 1.4 \, \text{m} \, \text{x} \, 0.7 \, \text{m}$ (6'-3" x 4'-8" x 2'-4")

15 kg (33 lbs) 3.2 m³ (113 ft³) 250 kg (552 lbs)

Lifelong

No.: Z2 15 07 10256 234 **TÜV Product Service**

Technical Data.

The following text can also be used for tenders.

Frameworx®-stainless steel tubes, Ø 60.3 mm (2 3/8") connected to a Frameworx®-aluminum ball connector; Ø 250 mm (9-13/16")

Nodes:

Frameworx®-aluminum ball connectors; Ø 250 mm (9-13/16"); anti-corrosion treatment and color finish: sandblasting and solvent-free zinc-/ epoxy-/ polyester-process; securely closed with durable EPDM-caps







