Terranova.2 – Product Specification



Terranova - Bent posts and four stunning designs

Terranova is a theme based fully modular low rope course system. While based on the same components as Terranova, Terranova scores with its organic appearance. Bent posts, contrasting clamp colours and the newly developed Chrox connector make Terranova a modern netscape package.

The four themes earth, fire, water and air give Terranova the right look whether you want to let it stand out from nature or blend in with it. Terranos structures are available in a Terranova theme as well.

Terranova.2 - at a glance.

Product Family: Item Number: Children's Age: Fall Height (DIN EN 1176): Length x Width x Height:

Protective Surfacing Area (DIN EN 1176): Protective Surfacing Area (ASTM 1487):


Minimum space required DIN EN 1176: Minimum space required ASTM 1487: Terranos & Terranova 96.180.002 5+ 2.60 m (8'-7") 15.4 x 13.1 x 5.0 m (50'-5" x 42'-9" x 16'-4") 18.4 x 17.2 m 19.1 x 17.5 m (62'-5" x 57'-3") 201.0 m² 218.2 m² (2,348.7 sf) Number of Foundations: Concrete Volume C20/C25: Number of skilled installers required: Installation Time without foundation: Dimensions of largest part:

Weight of heaviest part: Shipping Volume: Spare part guarantee: Certificate according to DIN EN 1176: 21 pc. 7.7 m³ (271.9 ft³) 2 persons 12 hours 0.1 x 0.1 x 5.3 m

116,6 kg Upon request Lifelong AL 12 05 10256 093 TÜV Product Service



Terranova.2 – Product Specifcation

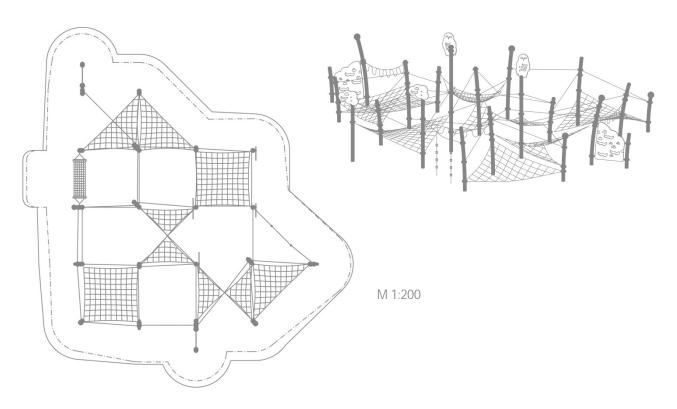

Technical Data.

The following text can also be used for tenders.

- 7 Planar nets
- 2 Terranova climbing walls
- 1 Hammock
- 3 Balancing ropes
- 1 Climbing ropes
- 3 Hand-over-hand rope loops

Ropes:

U-Rope®-round strand ropes with galvanized and covered wires: external strands with non-abrasive UV-resistant Polyester-yarn (no Polypropylene); rope-diameter Ø 16 mm (5/8")

Terranova posts:

Terranos[®] steel posts are bent in a little bow (r=9000 mm) with individual round cast aluminum post tops and Terranos-clamps with Chrox-connectors; Ø 133 mm (5 ¼''); wall thickness 7.1 mm (1/4''); anti-corrosion treatment and color finish: sandblasting and solvent-free zinc-/ epoxy-/ polyester-process

Terranos clamps:

Two-part cast aluminum connecting clamps for the heightadjustable connection of rope elements or steel pipes to Terranos steel posts; anti-corrosion treatment and color finish: sandblasting and solvent-free zinc-/ epoxy-/ polyester-process

Planar Net:

Rope Ø 18 mm (11/16"), mesh size minimum 250 x 250 mm (9-4/5"); rope crossing points localized by durable, drop forged aluminum ballknots (no plastic))



Terranova.2 - Specification





Technical Data.

Terranova climbing wall:

HDPE-panels available in the design according to the net structure (Fire, Earth, Water and Air)

Hammock:

Rope Ø 16 mm (5/8"); hammock net with mesh width approx. 100 x 100 mm (3-15/16" x 3-15/16"); with two in situ-replaceable square rungs; rungs comprised of stainless steel profile with aluminum end caps; two swivel joints connect to aluminum clamps

Balancing rope:

Ropes Ø 16 mm (5/8"); height of handrail approx. 900 mm (2-7 ½); consists of 1 balancing cable and 1 handrail; rope ends are fixed with cast aluminum Terranos clamps to steel posts

Climbing rope:

All ropes Ø 20 mm; vertical ropes with durable ebonite cylinders; distance between cylinders approx. 300 mm (11-13/16''); ebonite cylinders are fixed to the rope with aluminum ferrules; suspended from horizontal rope connected to steel posts

Hand-over-hand rope loops:

All ropes Ø 18 mm; length per loop 300 - 350 mm (11-13/16'' - 13 $\frac{3}{4}$ ''); loops durable fixed to a horizontal rope with aluminum ferrules

Terranova Symbol/Character:

HDPE-panels available in the design according to the net structure (Fire, Earth, Water and Air)